

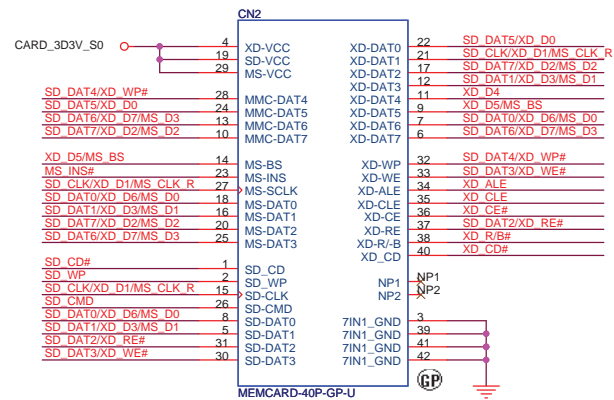


## 4 IN1 CARD-READER (SD/SD IO/MMC/MMC4.0/MS/MS PRO/XD)

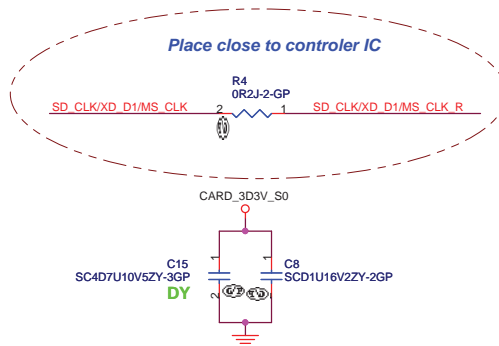

Ferrari 7 Cardreader Schematic EC Tracking Record ( For SA ) Jun.15 , 2007  
EC #/ Page / Description / Part Affected

- EC SA01/01/ 1. Change X1 P/N from "82.30006.261" to "82.30006.271", the reason is reduce package size.  
2. Change C11,C12 from 20pF to 27pF for crystal accuracy.
- EC SA02/01/ Change C14 from 0.1uF dummy to 47pF.
- EC SA03/01/ Reserve for VBUS=3.3V input.
- EC SA04/01/ Delete R3 resistor, the reason is reduce component count.
- EC SA05/01/ Delete R1,R2 resistor, the reason is reduce component count.
- EC SA06/01/ Reserve for debug use.
- EC SA07/01/ 未完成 !!!