




upload... www.mydigit.net

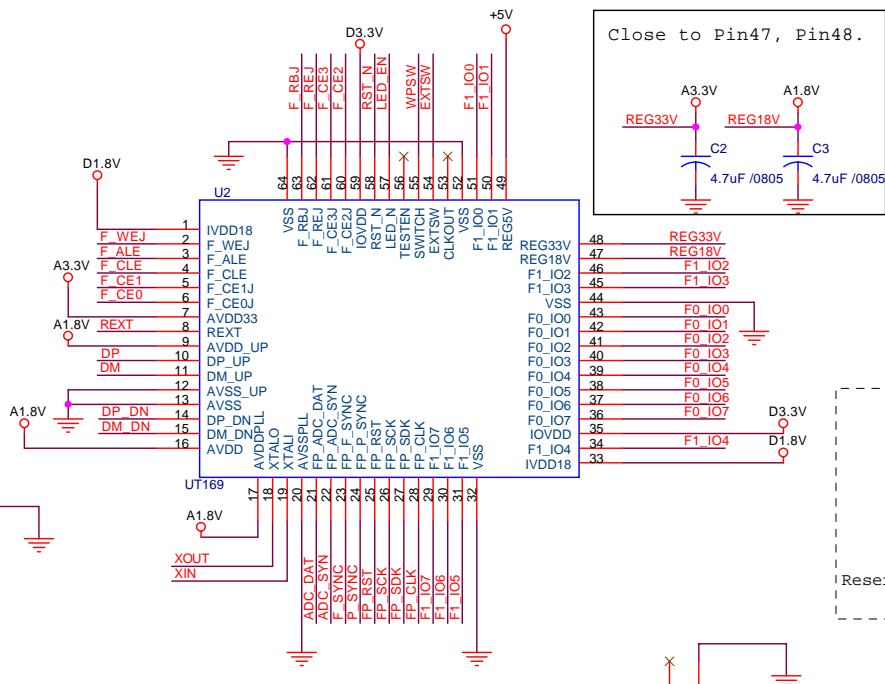




Layout note: C7 and C10 ground not connect together.

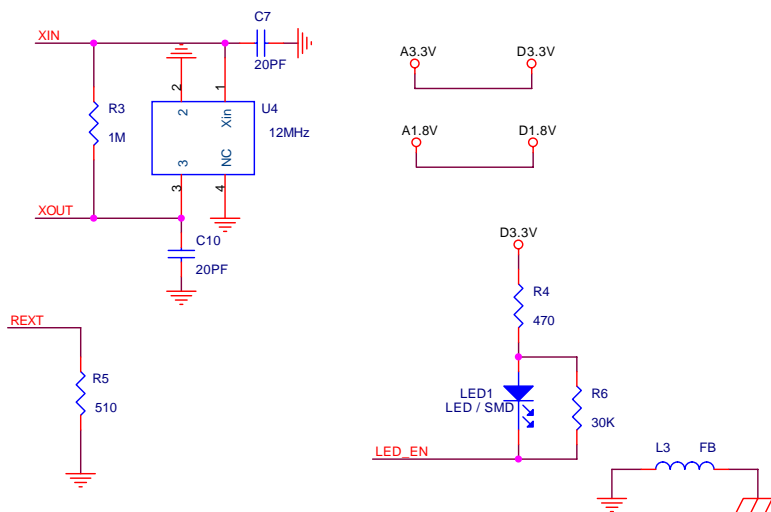


Place near U2.



Close to Pin47, Pin48.

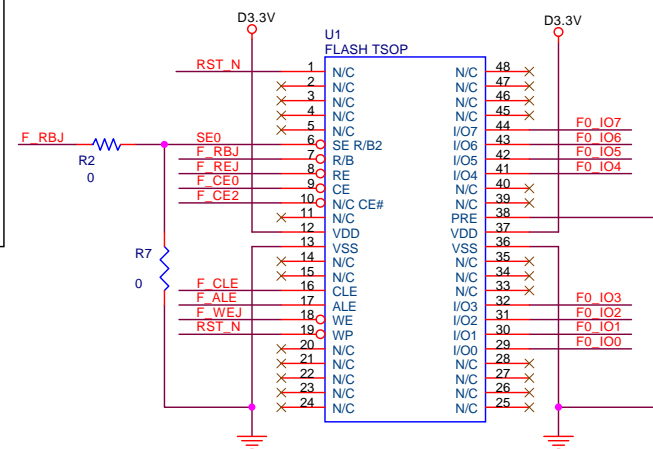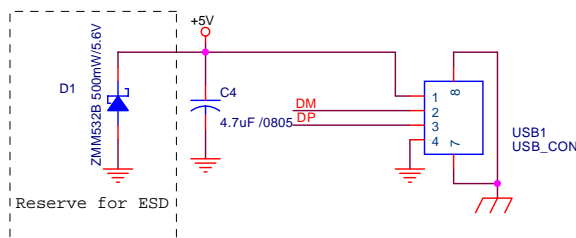


For Dual Dice flash, add R2.
For small block SLC, add R7.

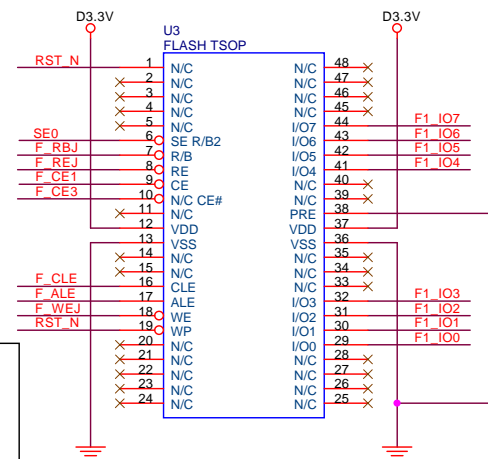

Layout note: USB differential trace is 90 Ohm characteristic impedance.

Finger Printer Circuit.

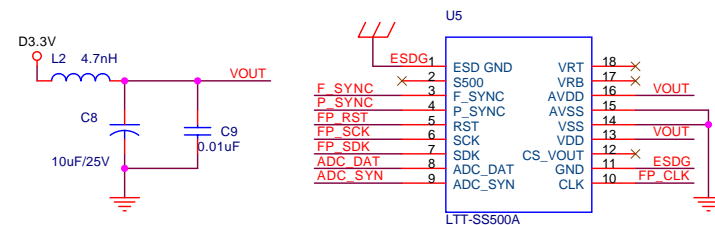

USBest Technology Inc.

Title				UT169 x 2 Flash PCB			
Size	Document Number						Rev
B	UT169 Finger Printer with Hub						0.92
Date:	Tuesday, June 28, 2005			Sheet	1 of 1		